HSF

NOTES:
Current Rating: 1.0AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: -40℃ to +105℃

Contact Material: Brass
Contact plating: Au Or Sn over Ni
Insulator Material: PA9T+30%G.F UL94V-0

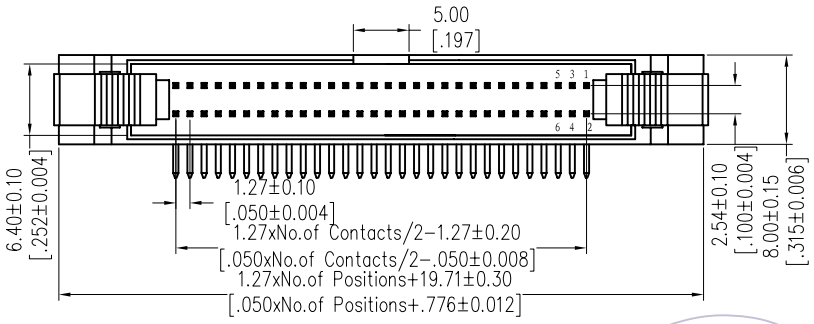

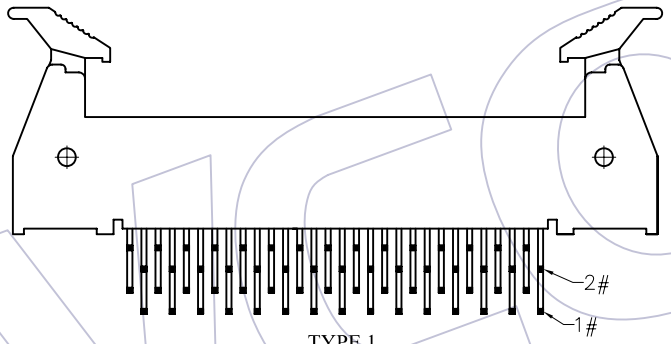

TYPE 1

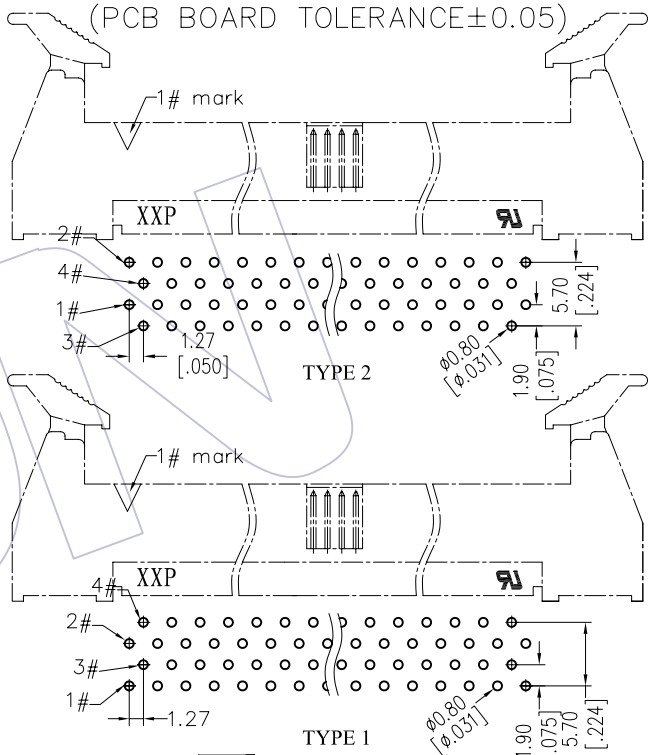

Ordering Information

3241- XX R XX B S X X

No.of Pins	Contact Plating	Color Insulator	Packing	Series No.
10 34 12 40 14 44 16 50 20 60 24 64 26 80 30 100 32	G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin	B=Black U=Blue W=White	T=Tube	1=Type 1 2=Type 2

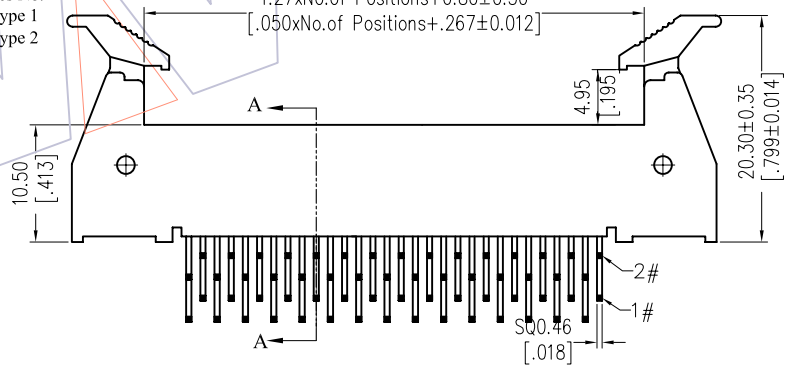

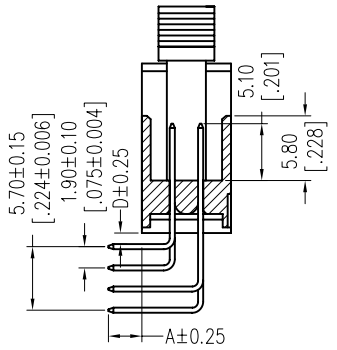

Item	Pitch	Mating
Standard	1.27X2.54	5242
Alternate		

Dimension antitheses list		
ITEM	A	D
Standard	3.00	1.00
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012/10/05	NEW	------

OPERATION		DRAW	DATE
X.X	±0.40	JYHuang	2012/10/05
X.XX	±0.25	CHECK	DATE
X.XXX	±0.15		
Angle	± 3°	APPROVE	DATE
DIM	TOL		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. 3241-XXRXXBSXX

TITLE: 1.27*2.54 EJECTOR HEADER 90° FOUR ROW

Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com