

HSF

Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)

NOTES:

Current Rating: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material:Phosphor Bronze
 Contact plating: Au over Ni
 Insulator Material:PA9T+30%GF UL94V-0


Ordering Information

2321-2 XX M XX CUN T X

No. of Pins per Row: 02-50Pin
 Contact Plating:
 G0=Gold Flash
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold

Packing:
 T=Tube
 P=Tube+CAP
 R=Tube&Reel+CAP

Series No.
 1=Type 1
 2=Type 2

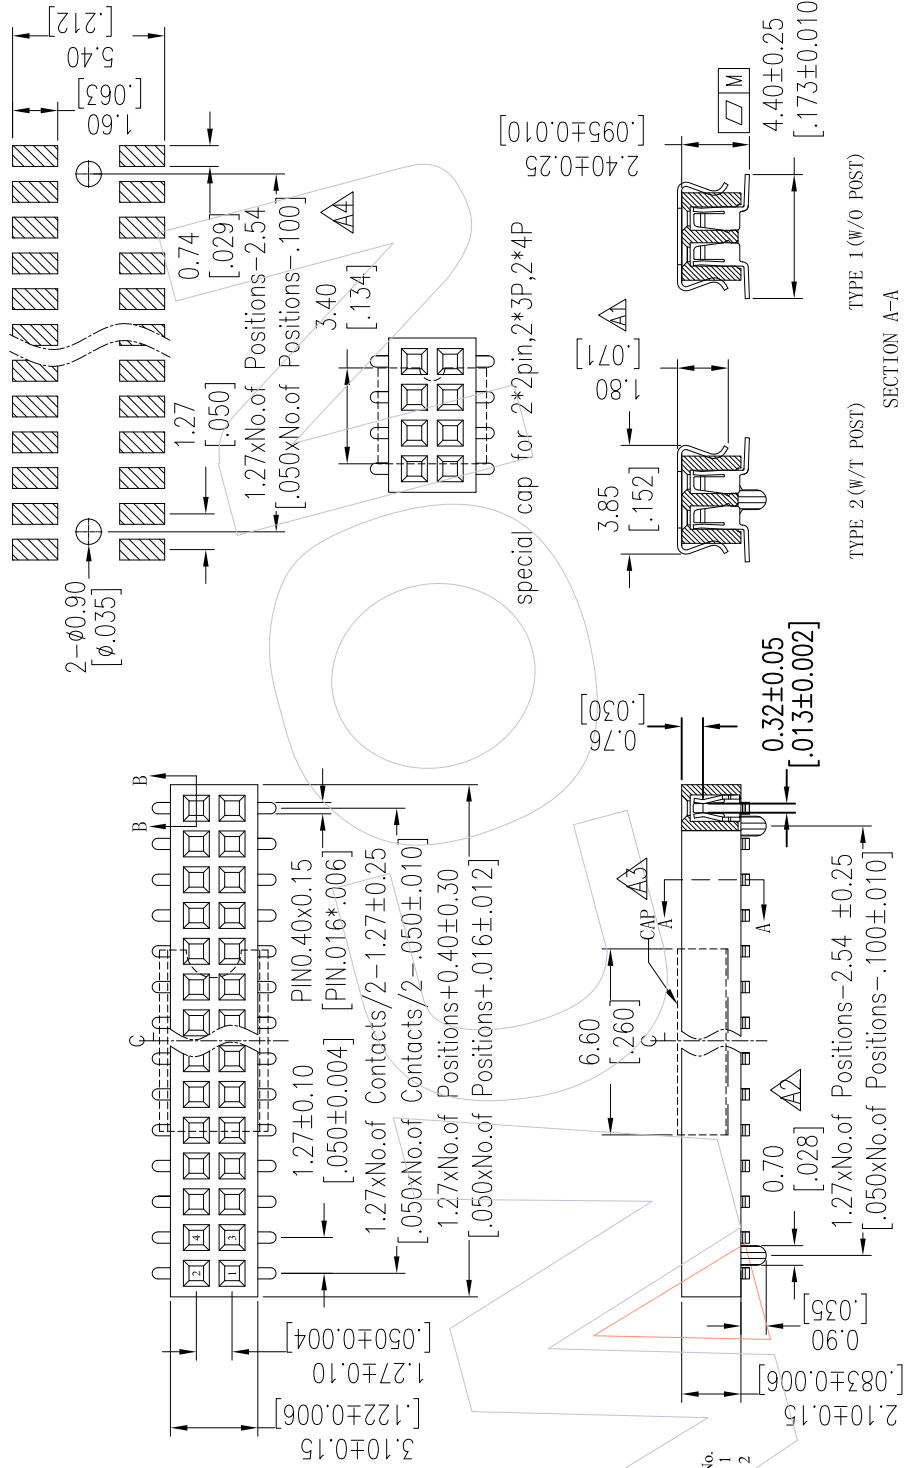

TYPE 2 (W/T POST)

TYPE 1 (W/O POST)

SECTION A-A

SECTION B-B

Item	Pitch	Mating
Standard	1.27	1310/1315/1320
Alternate		

	M=0.10	M=0.15	M=0.25
1~9P			
10~19P			
20P以上			

TITLE	PART NO.
TYPE 1	2321-2XXMXXCUNT1
TYPE 2	2321-2XXMXXCUNT2

REV	DATE	DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A4	2016/06/17	Modify CAP	3.40	x.x	±0.40	2016/06/17	UNIT	mm	SEE TABLE
A3	2014/12/30	Modify CAP		x.xx	±0.25		SIZE	A4	
A2	2014/11/04	Modify Post		x.xxx	±0.15		SHEET	1/1	
A0	2012/07/06	NEW		Angle	± 3'		PROJ.		
REV	DATE	DESCRIPTION	CHANGE						

TITLE:	Customer NO.
1.27mm DUAL FEMALE HEADER SMT H=2.10	

WCON	
WCON-Dongguan	WCON-Kunshan
Http: www.wcon.com	
WCON-Dongguan	WCON-Kunshan
Tel: +86 769 85358920	Tel: +86 512 57468408
Fax: +86 769 85358915	Fax: +86 512 57468468
E-mail: sales@wcon.com	E-mail: sales@wcon.com

柱子示意图