

HSF

NOTES:





Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact plating: Au Or Sn over Ni
 Insulator Material: PBT+30%G.F UL94V-0

Ordering Information

5350-XX B XX B 0 X

No. of Pins Contact Plating Color Insulator Series No.
 08 24 S0=Gold Flash/Ni B=Black 1=TYPE 1
 10 26 S3=10u"Gold/Ni G=Grey(427C) 2=TYPE 2
 14 28 S4=15u"Gold/Ni F=Grey(413C)
 16 34 S5=30u"Gold/Ni
 18 40 SN=TiN
 20 SW=Matte Tin

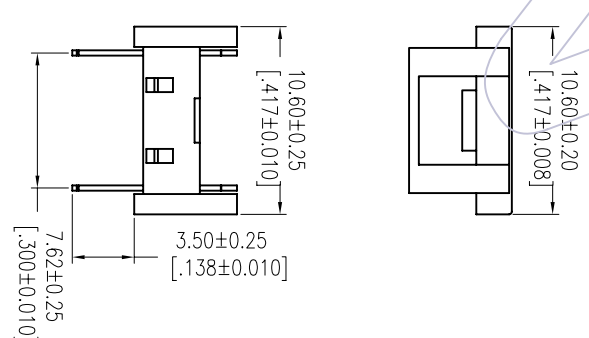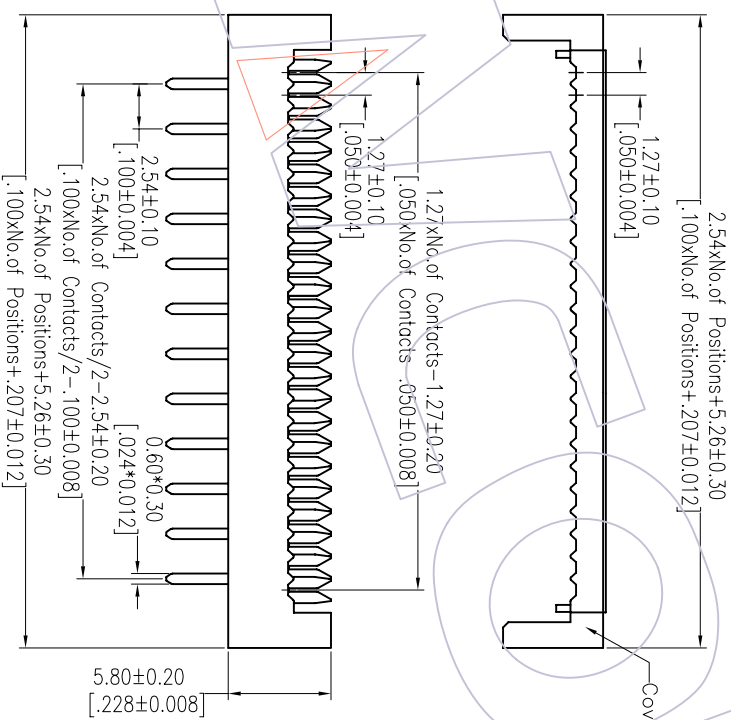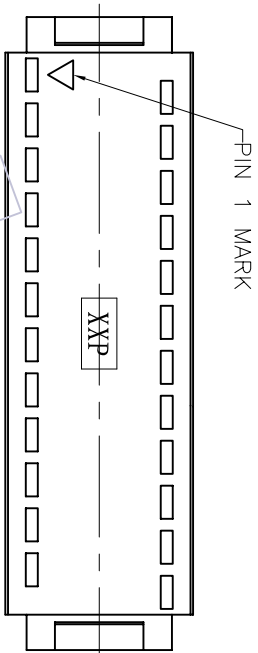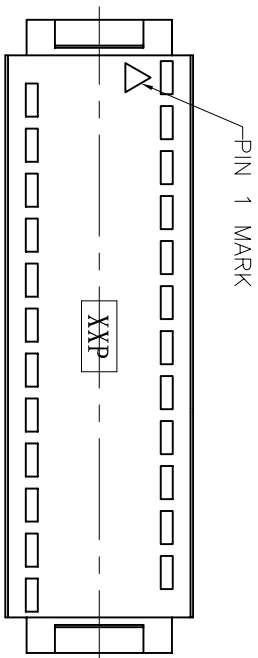

TYPE	PART NO.
TYPE 1	5350-XXBXXB01
TYPE 2	5350-XXBXXB02

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	Customer NO.	WCON-Dongguan	WCON-Kunshan
A1	2013/01/31	Modify The No. of Pins		XX	JYHuang	2013/01/31	mm	A4	SEE TAB	2.54x7.62 DIP PLUG CONNECTOR (TERMINATED HEIGHT 5.8)		Tel: +86 769 85358920	Tel: +86 512 57468408
A0	2012/10/09	NEW		X.XXX	CHECK	DATE	SIZE	SHEET				Tel: +86 769 85358915	Fax: +86 512 57468408
				Angle	APPROVE	DATE	1/1	PROJ.				E-mail: sales@wcon.com	E-mail: sales@wcon.com
				DIM	TOL								

Http: www.wcon.com