
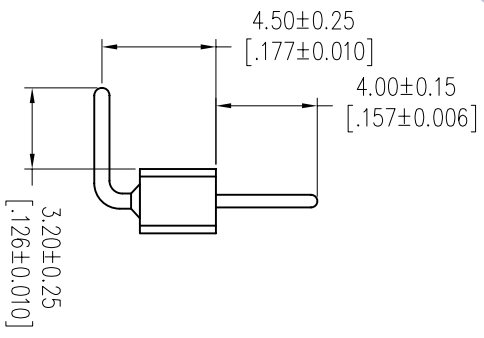
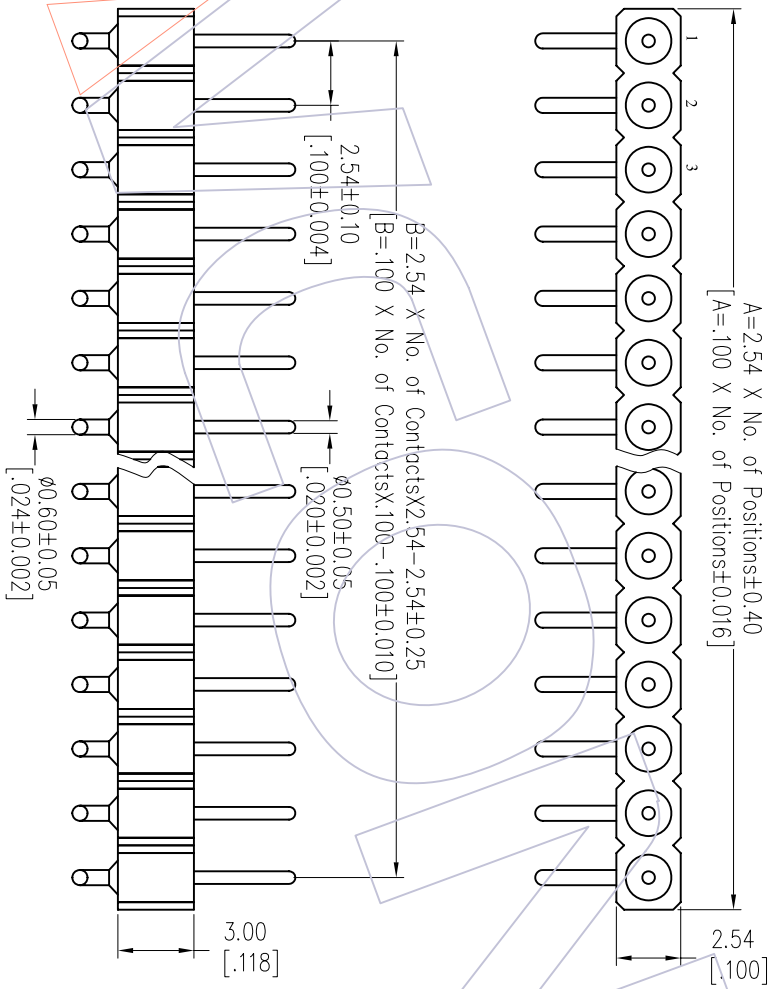


HSF

TECHNICAL SPECS:

Current Rating: 3.0AMP
 Contact Resistance: 10m Ω Max
 Dielectric Strength: Min 1000Vrms
 Mechanical Life: Min 500 cycles
 Operation Temperature: -40°C to +105°C

Sleeve: Brass CuZn36Pb3(C360000)
 Contact plating: Au over Ni
 Connecting Pin: ϕ 0.50mm
 Insulator Material: PPS+30%G.F.(UL94V-0)

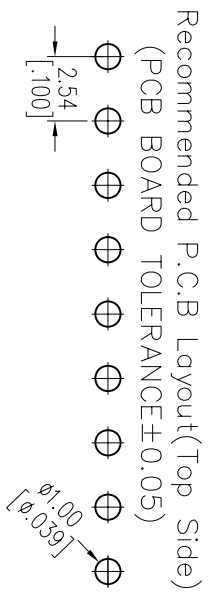

Ordering Information

3510-301 XX R XX 127 X 1

No. of Pin
2-50PIN

Contact Plating
G0=Gold Flash
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold

Packing
A=Tray
T=Tube

Item	Pitch	Mating
Standard	2.54	3520
Alternate		

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	WCON Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
XX	JYHuang	2012/10/22	mm		3510-301XXRXX127X1	
X.XX	CHECK	DATE	SIZE	A4	TITLE:	
X.XXX			±0.15	1/1	2.54mm MACHINED PIN HEADER SINGLE ROW 90° H=3.00 L=12.75	
Angle	APPROVE	DATE	SHEET	PROJ.	Customer NO.	
± 3°						
CHANG	DIW	TOL				
MODIFICATION	DESCRIPTION					
NEW						
2012/10/22						
REV	DATE					