

HSF

NOTES:

1. Insulator material: HIGH TEMPERATURE THERMOPLASTIC, UL94 V-0;
2. Terminal material: Copper Alloy; Terminal Plating: Au/Sn Plated Over Nickel ;
3. Rated Voltage: 300 V;
4. Rated Current: 3.0 A;
5. Contact Resistance: 20 mΩ Max;
6. Insulation Resistance: DC500V / 5000MΩ Min
7. Insulation Withstand Voltage: 1000V AC/1min;
8. Durability :200 cycling;
9. Operation Temperature: -25°C to +105°C;

Ordering Information:

7512 - XXX R X N XX D \triangle 0X







No. of: 006=6Pin
 Fixed Mode: S: 180°DIP
 R: 90°DIP
 M: SMT
 C: Splint
 100=100Pin

Color: B: Black
 W: White
 N: 无定位孔

material: A: PBT
 B: Nylon-66
 D: LCP

Contact Plated:
 SM: Matte Tin
 S0=Gold Flash/Tin
 S1=3u" Gold /Tin
 S5=30u" Gold /Tin
 W0=Gold Flash /Matte Tin
 W1=3u" Gold /Matte Tin
 W5=30u" Gold /Matte Tin

DIM. A脚距
 01: A=5.08
 02: A=3.81

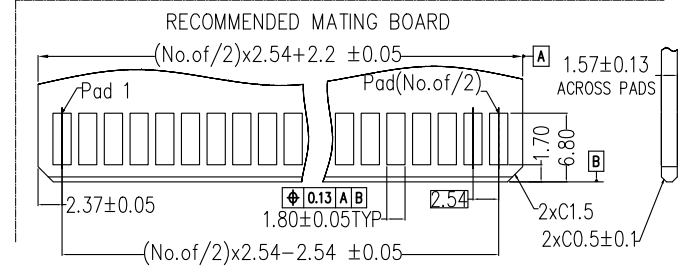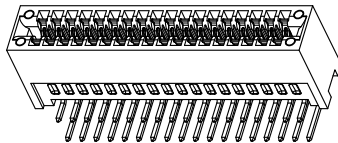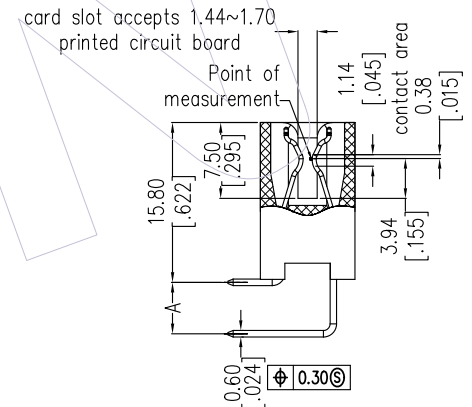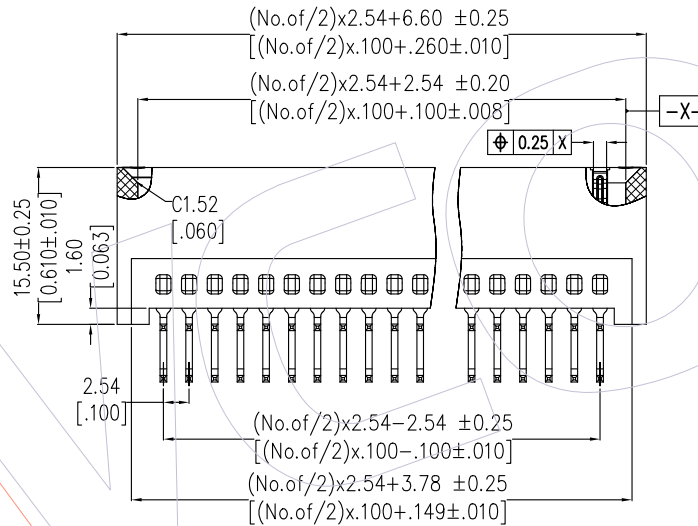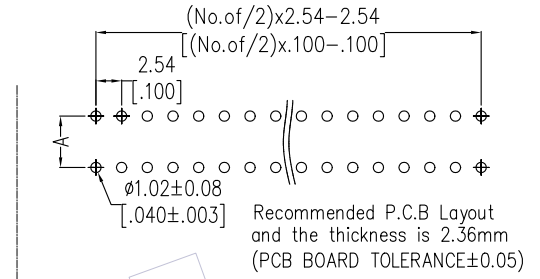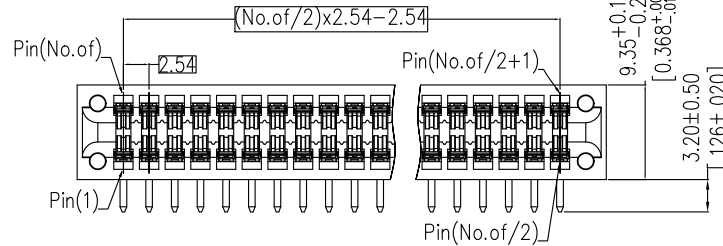

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A1	18/08/29	MODIFY P/N		x.x ±0.40	Surong Xu	2018/08/29	UNIT	mm	7512-XXXRXNXXD0X \triangle A1
AO	18/01/08	NEW	-----	x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE: 2.54mm Slot 90°DIP 脚距5.08/3.81 无定位孔
				x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
				Angle ± 3°			PROJ.		
				DIM TOL					

WCON
 Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: salesks@wcon.com