

# HSF

## Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)

### NOTES:

Current Rating: 1.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze  
 Contact plating: Au Or Sn over Ni  
 Insulator Material: PA9T+30%G.F UL94V-0

## Ordering Information


### 2344-2 XX M XX CUN X X

No. of Pins per Row: 02-50Pin  
 Contact Plating:  
 G0=Gold Flash  
 G2=10μ"Gold  
 G4=15μ"Gold  
 G5=50μ"Gold  
 S0=Gold Flash/Tin  
 S3=10μ"Gold/Tin  
 S4=15μ"Gold/Tin  
 S5=50μ"Gold/Tin  
 SN=Tin

Packing:  
 T=Tube  
 P=Tube+CAP  
 R=Tape&Reel+CAP

Series No.  
 1=Type 1  
 2=Type 2

Item	Pitch	Mating
Standard	1.27	1310/1315/1320/3131/3133/3100
Alternate		

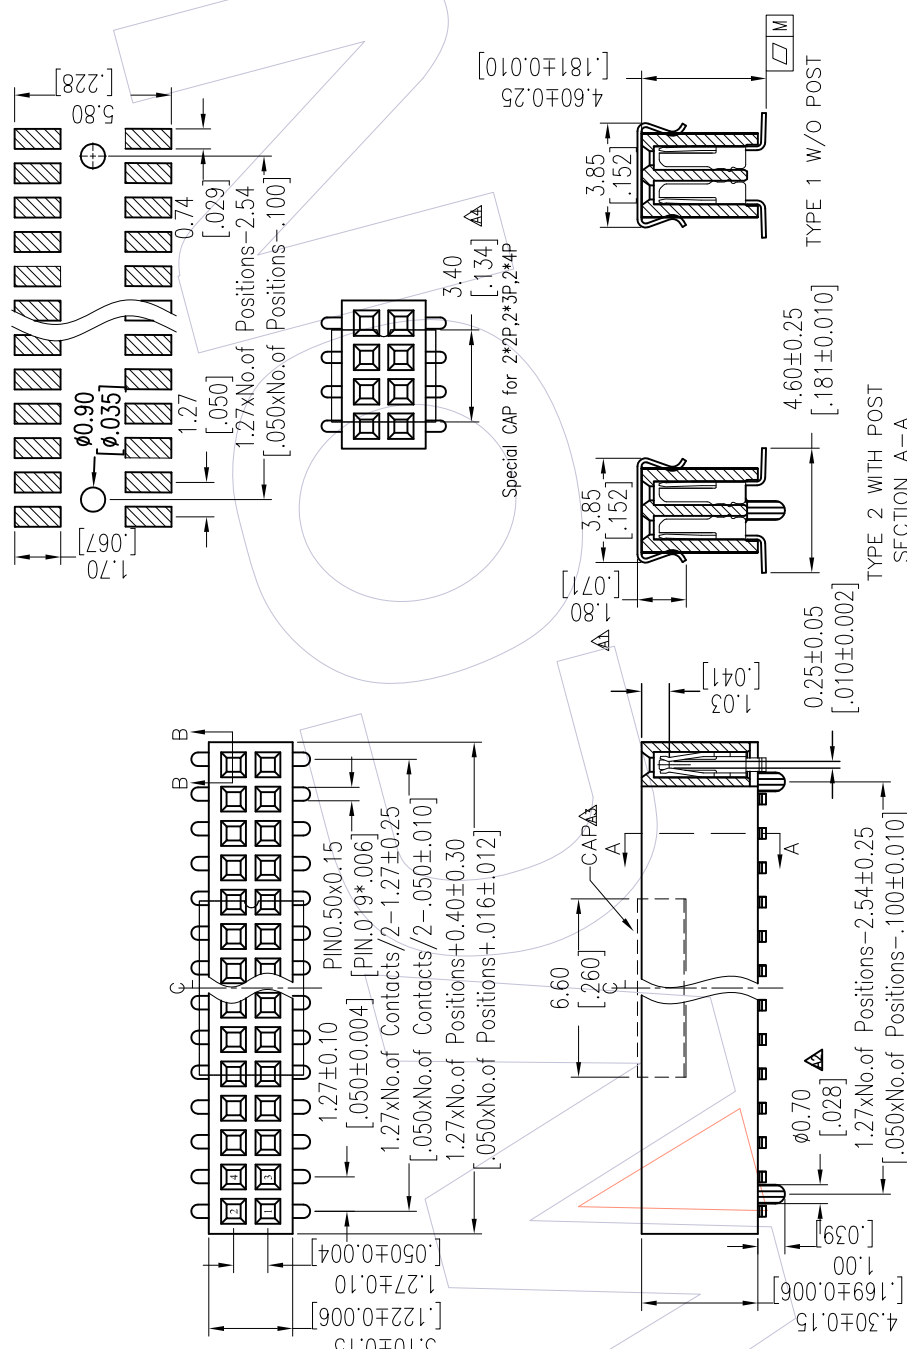

柱子示意图

1~9P	M=0.10
10~19P	M=0.15
20P以上	M=0.25

TITLE	PART NO.
TYPE 1	2344-2XXMXXCUNX1
TYPE 2	2344-2XXMXXCUNX2

**WCON**  
 Http: www.wcon.com  
 WCON-Dongguan Tel: +86 769 85358920  
 WCON-Kunshan Tel: +86 512 57468408  
 Fax: +86 769 85358915  
 E-mail: sales@wcon.com E-mail: sales@wcon.com

REV	DATE	DESCRIPTION	CHANGE	DIM	TOL	APPROVE	CHECK	Wang	DATE	SCALE	FIT	PART NO.	SEE TABLE
A4	2016/06/17	Modify CAP 3.00	→	3.40					2016/06/17				
A3	2014/12/30	Modify CAP											
A2	2014/10/29	Modify Post											
A1	2013/08/21	Modify cap 2.00	→	1.80									
REV	DATE	MODIFICATION	DESCRIPTION	CHANGE	DIM	TOL	APPROVE	CHECK	Wang	DATE	SCALE	FIT	SEE TABLE

TITLE	PART NO.
TYPE 1	2344-2XXMXXCUNX1
TYPE 2	2344-2XXMXXCUNX2